



遮音性能

耐火ヴァンドRZ75/RZ75V-600

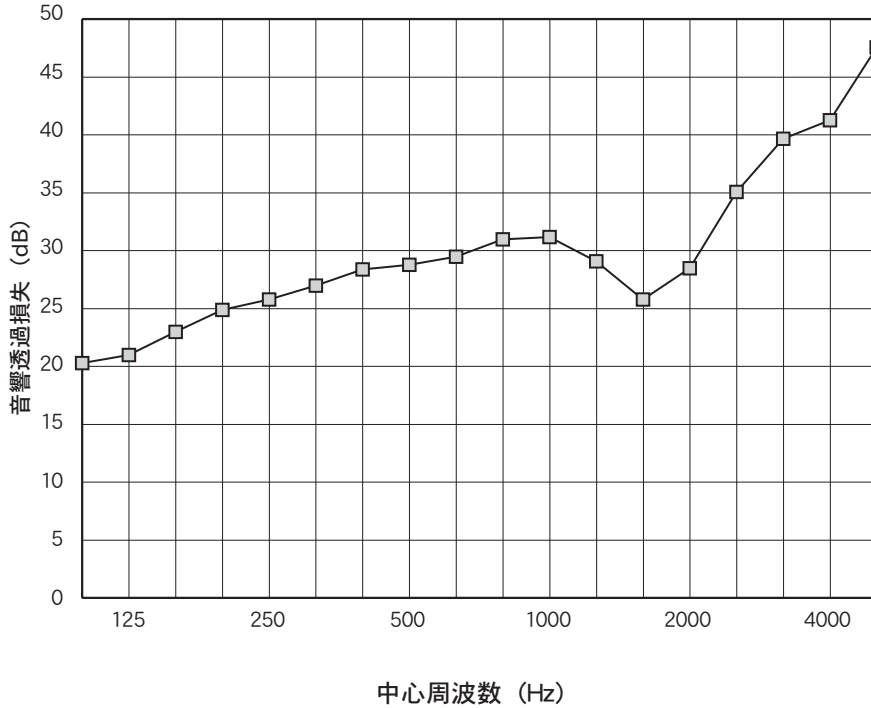

中心周波数 (Hz)	透過損失 (dB)
100	20.3
125	21.0
160	23.0
200	24.9
250	25.8
315	27.0
400	28.4
500	28.8
630	29.5
800	31.0
1000	31.2
1250	29.1
1600	25.8
2000	28.5
2500	35.1
3150	39.7
4000	41.3
5000	47.6


耐火ヴァンドRZ75/RZ75V-900

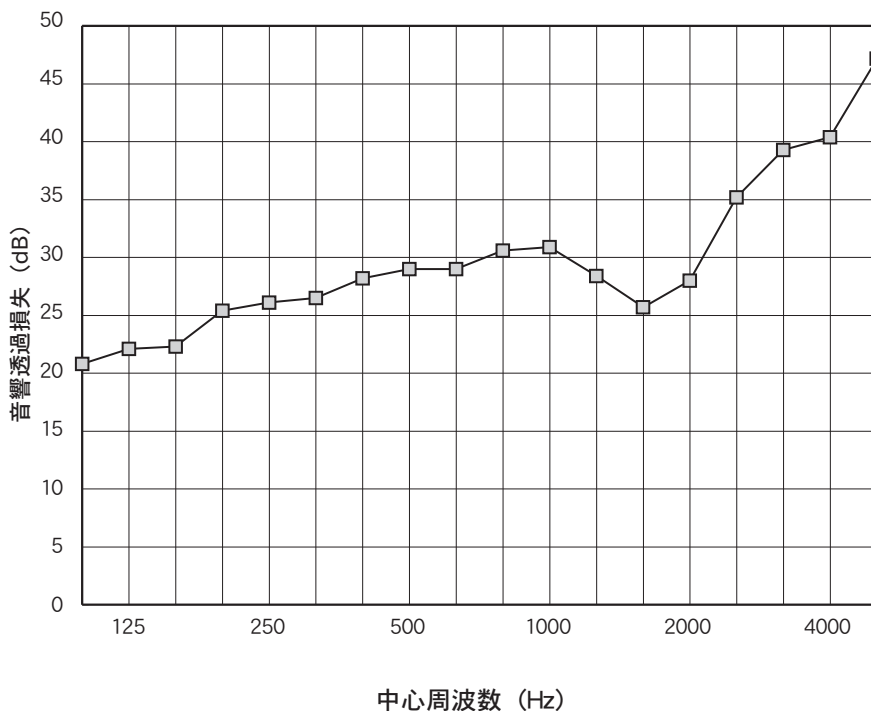

中心周波数 (Hz)	透過損失 (dB)
100	20.8
125	22.1
160	22.3
200	25.4
250	26.1
315	26.5
400	28.2
500	29.0
630	29.0
800	30.6
1000	30.9
1250	28.4
1600	25.7
2000	28.0
2500	35.2
3150	39.3
4000	40.4
5000	47.2


遮音性能

耐火ヴァンドRZ50/RZ50V-600

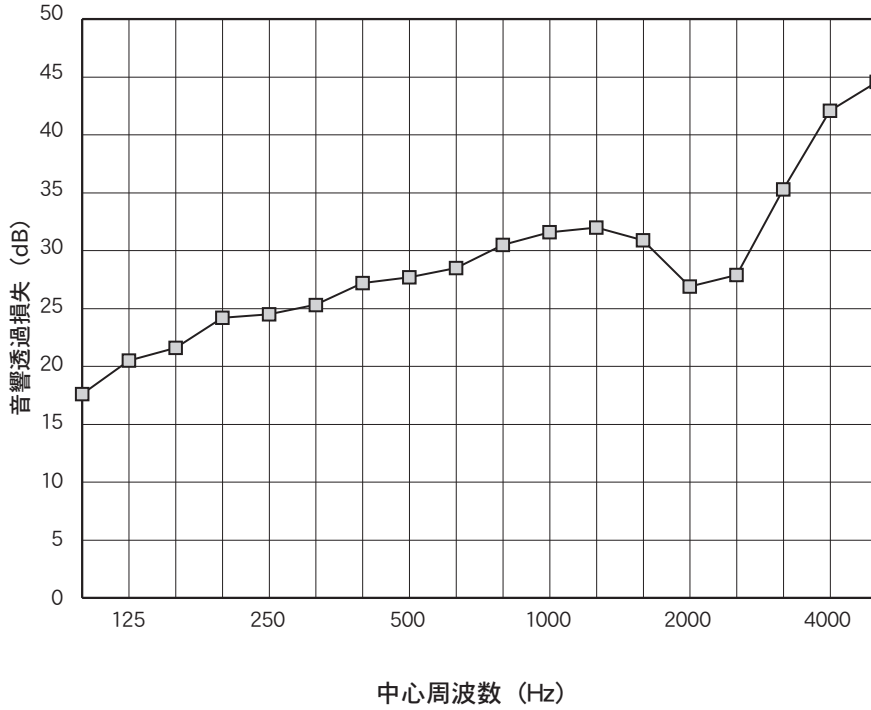

中心周波数 (Hz)	透過損失 (dB)
100	17.6
125	20.5
160	21.6
200	24.2
250	24.5
315	25.3
400	27.2
500	27.7
630	28.5
800	30.5
1000	31.6
1250	32.0
1600	30.9
2000	26.9
2500	27.9
3150	35.1
4000	42.1
5000	44.6


耐火ヴァンドRZ50/RZ50V-900

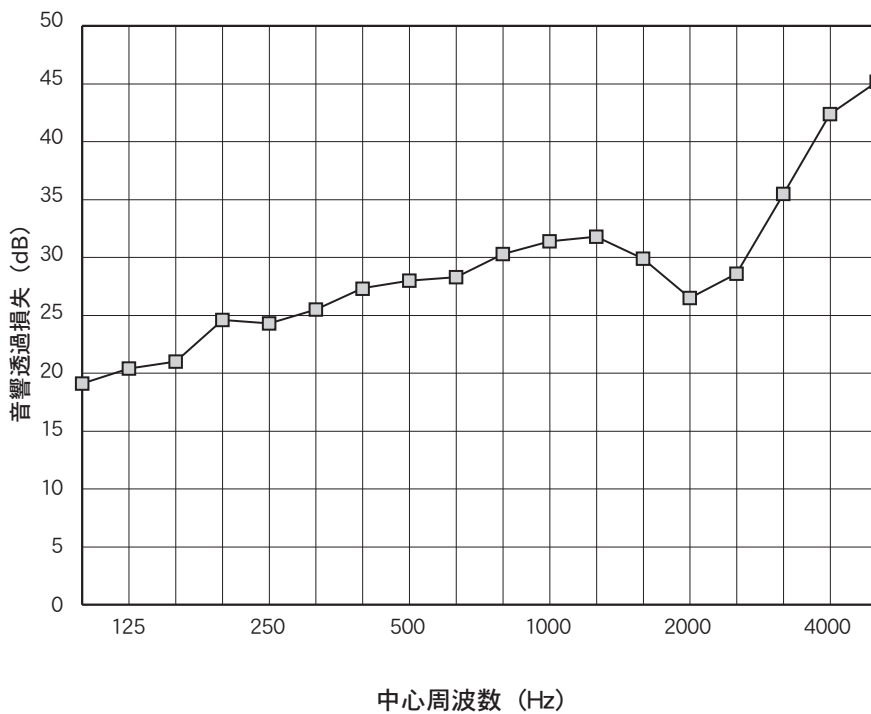

中心周波数 (Hz)	透過損失 (dB)
100	19.1
125	20.4
160	21.0
200	24.6
250	24.3
315	25.5
400	27.3
500	28.0
630	28.3
800	30.3
1000	31.4
1250	31.8
1600	29.9
2000	26.5
2500	28.6
3150	35.5
4000	42.4
5000	45.2


遮音性能

断熱ヴァンドNZ50-600

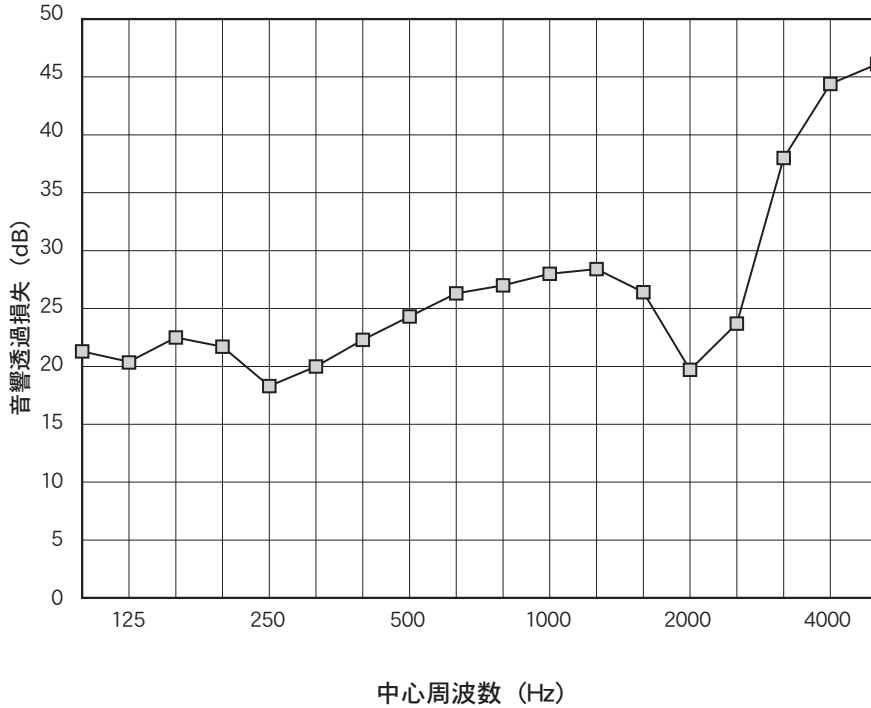

中心周波数 (Hz)	透過損失 (dB)
100	21.3
125	20.4
160	22.5
200	21.7
250	18.3
315	20.0
400	22.3
500	24.3
630	26.3
800	27.0
1000	28.0
1250	28.4
1600	26.4
2000	19.7
2500	23.7
3150	38.0
4000	44.4
5000	46.1


断熱ヴァンドNZ50-900

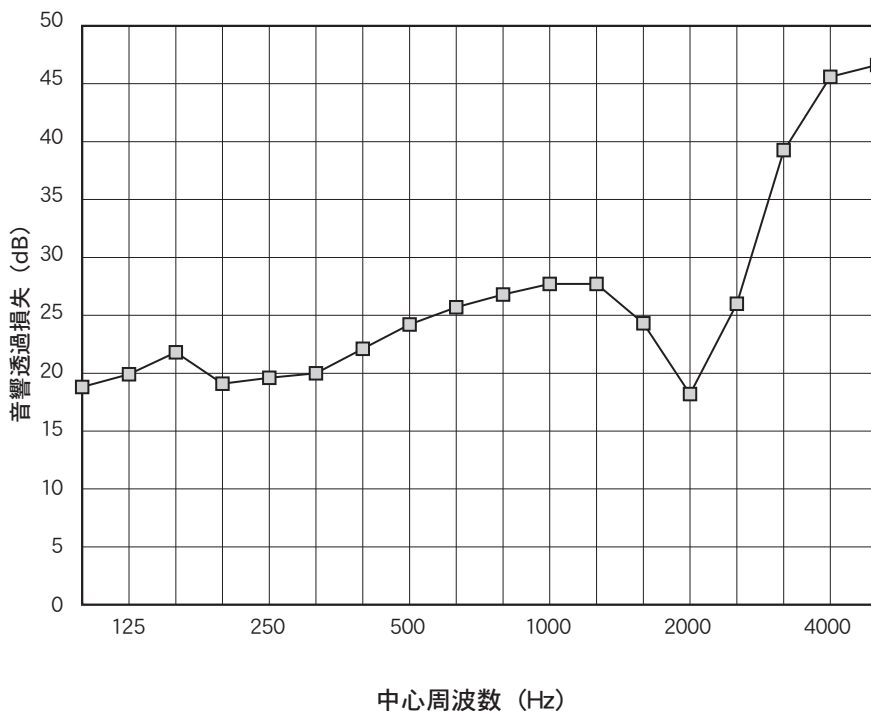

中心周波数 (Hz)	透過損失 (dB)
100	18.8
125	19.9
160	21.8
200	19.1
250	19.6
315	20.0
400	22.1
500	24.2
630	25.7
800	26.8
1000	27.7
1250	27.7
1600	24.3
2000	18.2
2500	26.0
3150	39.2
4000	45.6
5000	46.6


遮音性能

断熱ヴァンドNZ50F-600

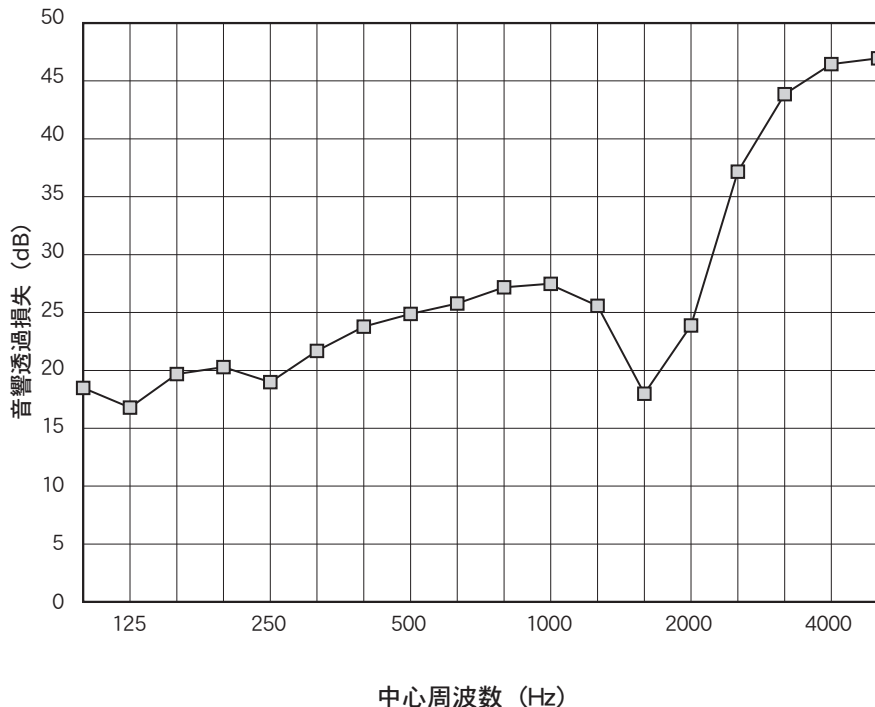

中心周波数 (Hz)	透過損失 (dB)
100	18.5
125	16.8
160	19.7
200	20.3
250	19.0
315	21.7
400	23.8
500	24.9
630	25.8
800	27.2
1000	27.5
1250	25.6
1600	18.0
2000	23.9
2500	37.2
3150	43.9
4000	46.5
5000	47.0


断熱ヴァンドNZ50F-900

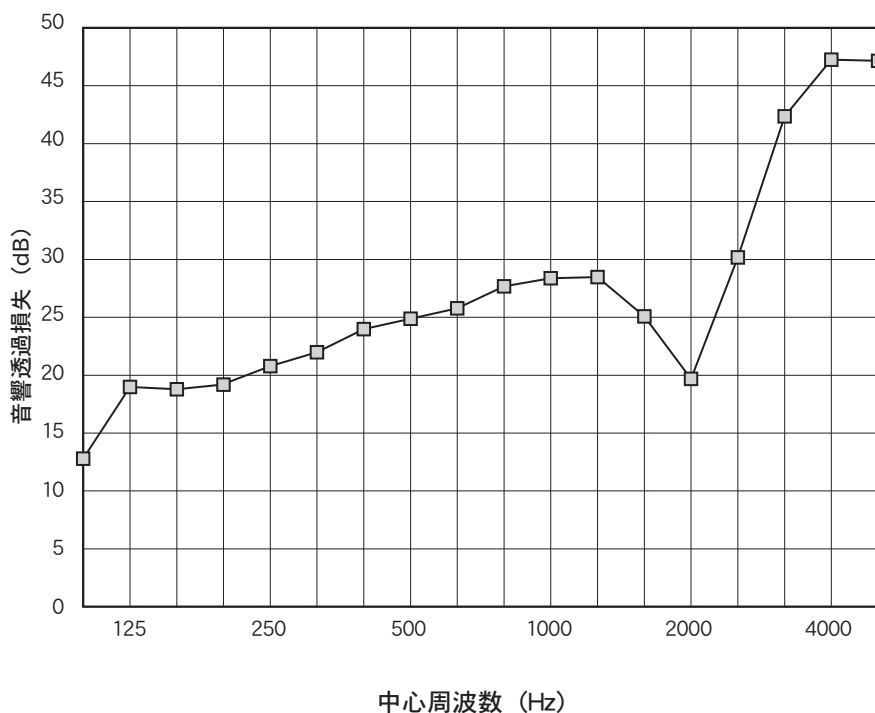

中心周波数 (Hz)	透過損失 (dB)
100	12.8
125	19.0
160	18.8
200	19.2
250	20.8
315	22.0
400	24.0
500	24.9
630	25.8
800	27.7
1000	28.4
1250	28.5
1600	25.1
2000	19.7
2500	30.2
3150	42.4
4000	47.3
5000	47.2

遮音性能

断熱ヴァンドNZ35-600

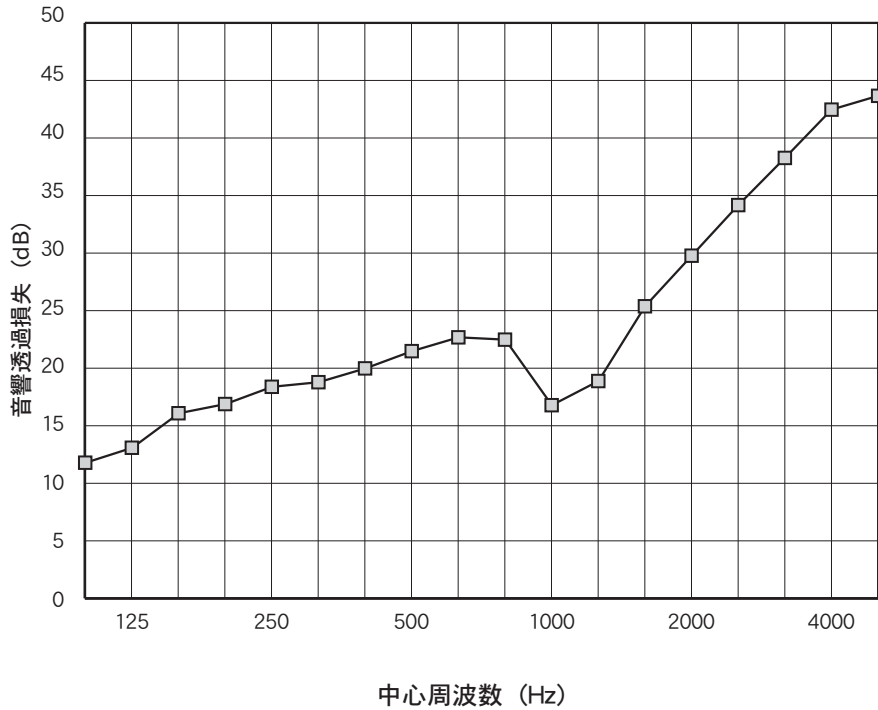


中心周波数 (Hz)	透過損失 (dB)
100	11.8
125	13.1
160	16.1
200	16.9
250	18.4
315	18.8
400	20.0
500	21.5
630	22.7
800	22.5
1000	16.8
1250	18.9
1600	25.4
2000	29.8
2500	34.2
3150	38.3
4000	42.5
5000	43.7

○試験方法：JIS-A-1416 ○検査機関：(一財)建材試験センター


遮音性能

断熱ヴァンドNZ35F-600

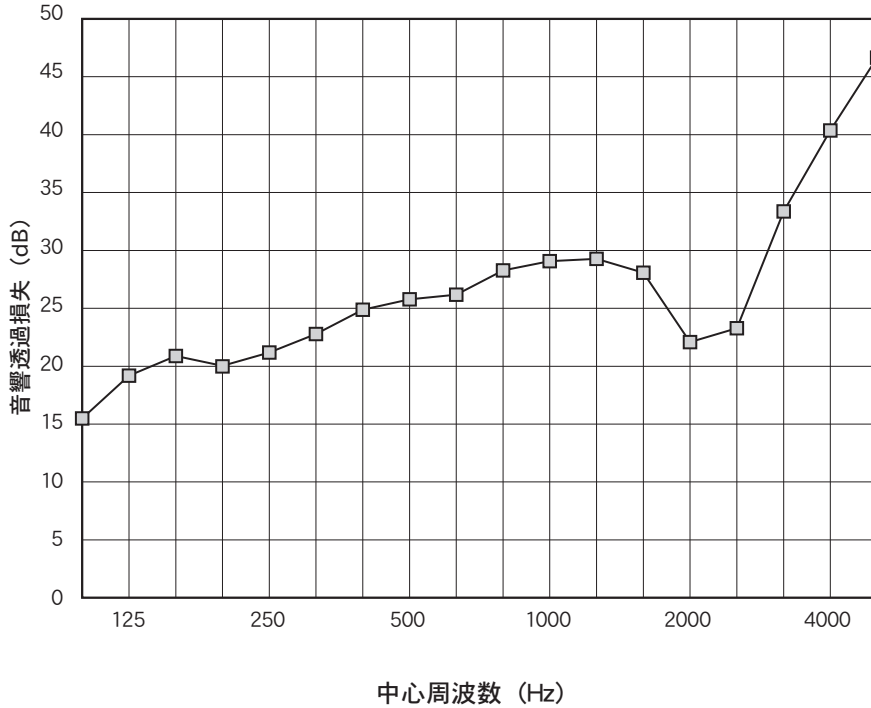

中心周波数 (Hz)	透過損失 (dB)
100	15.5
125	19.2
160	20.9
200	20.0
250	21.2
315	22.8
400	24.9
500	25.8
630	26.2
800	28.3
1000	29.1
1250	29.3
1600	28.1
2000	22.1
2500	23.3
3150	33.4
4000	40.4
5000	46.7

断熱ヴァンドNZ35F-900

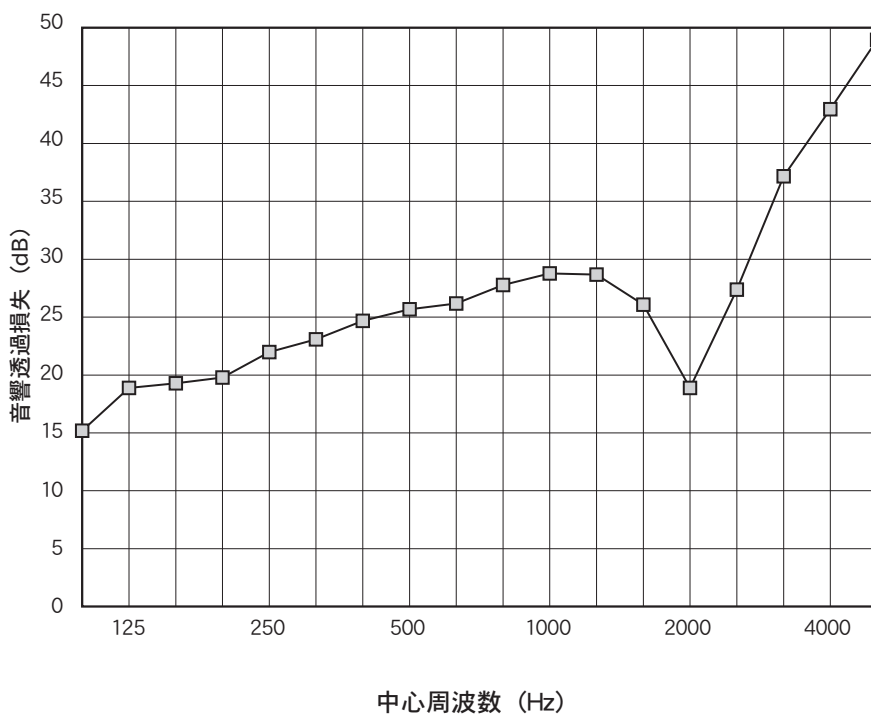

中心周波数 (Hz)	透過損失 (dB)
100	15.2
125	18.9
160	19.3
200	19.8
250	22.0
315	23.1
400	24.7
500	25.7
630	26.2
800	27.8
1000	28.8
1250	28.7
1600	26.1
2000	18.9
2500	27.4
3150	37.2
4000	43.0
5000	49.0